MADE IN USA

LUBRIKON®

QUALITY OILS

MAXI SAE 50 ND

DIESEL MINERAL SAE 50 ND

MAXI SAE 50 ND

MAXI SAE 50 ND is a monograde lubricant oil without detergent for the old diesel and gasoline engines that operate in favorable conditions, not required where the protection of the composite oil is not necessary.

Its formula based on refined paraffinic oils does not contain detergents, but has additives to increase the resistance to oxidation, protect against corrosion and foam formation.

This category should be used only when the engine manufacturer specifically required, it can also be used in automotive transmissions where a pure mineral oil is indicated and in non-required industrial hydraulic systems that also require it.

Features	ASTM Method	SAE 50
Gravity API		23
VIS cSt@100°C	ASTM D445	16.7
Viscosity Index	ASTM D2270 / ISO2909	50
Flash Point, °C (°F)	ASTM D92	205 (440)
Color ASTM	ASTM D-1500	5

*The values shown in the table of typical characteristics are approximate or referential, as an indication and do not constitute a guarantee. These values can be modified without prior notice. The results of the production lots may differ slightly. This does not affect the performance of the product.

BENEFITS TO THE COSTUMER

• Oil for multiple use in services and conditions where a lubricant without detergents is requested.

• Adequate protection against corrosive wear and friction wear.

Presentations

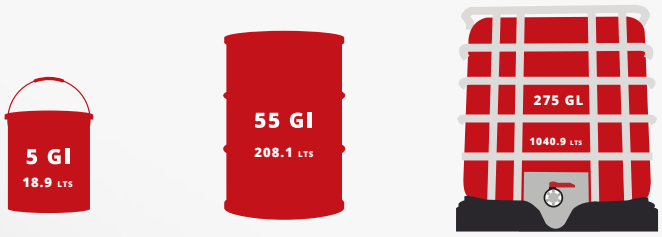

Storage

It is recommended to store the drums in covered areas; when stored outdoors should be laid horizontally to avoid possible leakage and deterioration. The store should not exceed 140 °F temperature, the products should not be exposed to the direct incidence of the sun or places of low temperatures.

Scan QR for Contact

www.lubrikonusa.com
sales@lubrikonusa.com
5407 NW 72nd Ave, Miami, FL 33166
1-800-986-4270